

TECHNICAL SPECIFICATION

LSSS-LN0064-06

FOR

4 PAIR SF/UTP CABLES (CATEGORY 6)

(Ref : ISO/IEC 11801, IEC 61156-5)

Prepared by : K. H. Ha.
Kyung-ho, Ha
Engineer
Telecommunication Technology Team

Approved by : Su Jong Kim
Su-jong, Kim
Manager
Telecommunication Technology Team

1. SCOPE

This specification is based on the standards of IEC 61156-5 and ISO/IEC 11801, and covers the requirements for screened foiled twisted pair (SF/UTP) cables of 100Ω, Category 6 (Cat.6).
 - Applicable cable size & type ; 4 Pairs, PVC or LSZH sheath

2. CABLE CONSTRUCTION

2.1 Conductor

The conductors shall be solid , annealed and bare copper with a diameter of AWG23~24 and minimum acceptable diameter shall be 0.485mm.

2.2 Insulation

Each conductor shall be insulated with solid high density polyethylene. The insulation shall be uniform and shall not have any defects. The diameter over the insulation shall be maximum 1.22mm.

2.3 Color code

The color code of insulation shall be shown as Table 1.

Table 1. Color code of insulation

Pair No.	A - wire		B - wire	
	Base	Stripe	Base	Stripe
1	White	Blue	Blue	-
2	White	Orange	Orange	-
3	White	Green	Green	-
4	White	Brown	Brown	-

*Note) The stripe marking shall be applied on the white color.

2.4 Core Assembly

Two insulated conductors shall be twisted into a pair. Four twisted pairs shall be assembled into a cable core. The cross(X)-shaped filler shall be inserted between pairs for sufficient isolation of pairs to improve crosstalk characteristics.

2.5 Screen

The polyester tape shall be applied over the cable core for core wrapping, **if necessary**. The aluminum tape coated on one side with plastic film shall be applied over the core wrapping for screening. The braided screen with tinned copper wires shall be applied over aluminum tape screen. The percentage of braid coverage shall be minimum 30% according to EN 50288 standard.

2.6 Sheath

The flame retardant PVC or LSZH(Low Smoke Zero Halogen) compound colored grey or other colors shall be applied over the screening. The sheath shall be uniform and shall not have any defects. The thickness of sheath and cable diameter shall be shown as table 2.

Table.2 thickness of sheath and cable diameter

Thickness (mm)	Outer Diameter (mm)
0.5±0.05	7.5±0.3

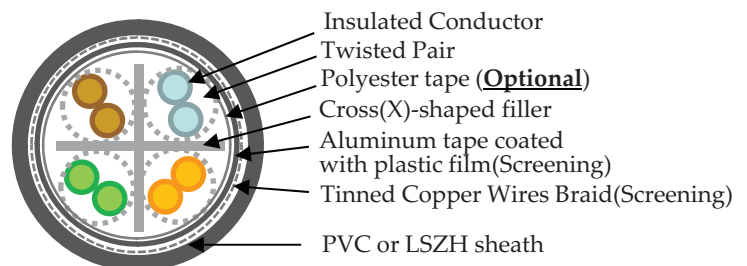


Fig 1. Cross Sectional Diagram of Cable

- The drawing appearing on this page may be subject to change or modification without any prior notice -

3. ELECTRICAL CHARACTERISTICS

3.1 Electrical Performances

Characteristics	units	Specification
DC Resistance	$\Omega/100\text{m}$	≤ 9.5
DC Resistance Unbalance	%	≤ 2.00
Capacitance Unbalance (Pair to Ground)	pF/km (800~1000Hz)	≤ 1600
Insulation Resistance	$\text{M}\Omega\cdot\text{m}$	≥ 5000
Dielectric Strength	DC kV/sec	2.5 / 2
Impedance (Characteristic mean)	Ω	$100 \pm 5\%$ (at 100MHz)
Return Loss	dB/100m	$\geq 20 + 5 * \log(\text{freq})$, 4 $\leq f < 10\text{MHz}$ ≥ 25 , 10 $\leq f < 20\text{MHz}$ $\geq 25 - 7 * \log(\text{freq}/20)$, 20 $\leq f \leq 250\text{MHz}$
Attenuation (Insertion Loss)	dB/100m	$\leq 1.82*\sqrt{(\text{freq}) + 0.0169*(\text{freq}) + 0.25/\sqrt{(\text{freq})}}$, 4 ~ 250 MHz
NEXT Loss	dB/100m	$\geq 75.3 - 15*\log(\text{freq})$, 4 ~ 250MHz
Power sum NEXT Loss	dB/100m	$\geq 72.3 - 15*\log(\text{freq})$, 4 ~ 250MHz
ELFEXT Loss	dB/100m	$\geq 68 - 20*\log(\text{freq})$, 4 ~ 250MHz
Power sum ELFEXT Loss	dB/100m	$\geq 65 - 20*\log(\text{freq})$, 4 ~ 250MHz
Propagation Delay	ns/100m	$\leq 534 + 36 / \sqrt{(\text{Freq})}$, 4 ~ 250MHz
Propagation Delay Skew	ns/100m	≤ 45 , 4 ~ 250MHz

Freq. (MHz)	Attenuation (dB/100m) Max.	NEXT (dB/100m) Min.	PSNEXT (dB/100m) Min.	ELFEXT (dB/100m) Min.	PSELFEXT (dB/100m) Min.	RL (dB/100m) Min.	P.Delay (ns/100m) Max.
4	3.8	66.3	63.3	56.0	53.0	23.0	552
8	5.4	61.8	58.8	49.9	46.9	24.5	547
10	6.0	60.3	57.3	48.0	45.0	25.0	545
16	7.6	57.2	54.2	43.9	40.9	25.0	543
20	8.5	55.8	52.8	42.0	39.0	25.0	542
25	9.6	54.3	51.3	40.0	37.0	24.3	541
31.25	10.8	52.9	49.9	38.1	35.1	23.6	540
62.5	15.5	48.4	45.4	32.1	29.1	21.5	539
100	19.9	45.3	42.3	28.0	25.0	20.1	538
155	25.3	42.4	39.4	24.2	21.2	18.8	537
200	29.1	40.8	37.8	22.0	19.0	18.0	537
250	33.0	39.3	36.3	20.0	17.0	17.3	536

The cable performance between 1MHz and 4MHz is achieved by design only and it is therefore not necessary to test for this performance below 4MHz. (According to the IEC 61156-5 standard)

3.2 Measurements Precaution

All electrical characteristics specified in clause 3.1 shall be tested on one sample length of 100 meter or greater removed from the package.

4. PHYSICAL PROPERTIES

4.1 Insulation

The un-aged elongation, measured in accordance with clause 6.4.4 of IEC 61156-5 shall be minimum 100% , respectively.

The shrinkage of insulation, measured in accordance with clause 6.5.1 of IEC 61156-5, shall not exceed 5%

The bending test of insulation at low temperature, measured in accordance with clause 6.5.3 of IEC 61156-5, shall show no visible cracks.

4.2 Sheath

The un-aged tensile strength and elongation, measured in accordance with clause 6.4.6 & 6.4.7 of IEC 61156-5 shall be minimum 9MPa and 100%, respectively.

The heat-aged tensile strength and elongation, measured in accordance with clause 6.5.4 & 6.5.5 of IEC 61156-5 shall be minimum 70% and 50% of un-aged, respectively.

The LSZH compound shall meet with IEC 60754-2 and IEC 61034.

4.3 Cable Cold Bend

All cables shall meet the requirements of clause 6.5.7 of IEC 61156-5.

4.4 Flame Requirements

The CMX rated cable shall comply with the VW-1 flame test specified in section 1080 of UL 1581 or IEC 60332-1.

The CM rated cable shall comply with the vertical flame test specified in UL 1685 or IEC 60332-3.

5. MARKING OF CABLES

The cable shall be marked on the sheath to designate the transmission performance and /or others (If ordered by purchaser).
The marking shall be repeated through the outer sheath clearly.

6. PACKING

Each length of completed cable shall be wound on ply-wood reel or reel-in-box.
The standard delivery length is 305m or 500m.

7. MARKING ON TAG OR REEL

The following details shall be marked on a tag affixed to each shipping length of cable in a reel, or directly printed on the outer surface of the reel.

- 1) AWG size and number of pairs
- 2) Flame test classification
- 3) Manufacturer name and logo
- 4) Length
- 5) Others

- End of Specification -

※ APPENDIX – PRODUCT PART NUMBER

Description	Part Number
Category 6 SF/UTP 4Pair CMX	SFP-G-C6G-E1VN-X 0.5X004P/xx
Category 6 SF/UTP 4Pair CM	SFP-G-C6G-E1VN-M 0.5X004P/xx
Category 6 SF/UTP 4Pair LSZH 332-1	SFP-G-C6G-E1ZN-X 0.5X004P/xx
Category 6 SF/UTP 4Pair LSZH 332-3	SFP-G-C6G-E1ZN-M 0.5X004P/xx

- xx denotes color: WH=White, BL=Blue, GY=Gray, VI=Violet, OR=Orange, RD=Red, GN=Green, YL=Yellow, BK=Black
 - Other colors are available

REV.	Date	Prepared By	Checked By	Approved By	Remark
00	2009.08.13	T.W. Kim	B.C. Jeong	Min Son	1. Issued
01	2010.01.21	T.W. Kim	K.H. Ha	Min Son	1. Clause 2.5 Screen is changed. - Tinned Copper Wire is omitted.
02	2011.10.17	K. H. Ha	T.W. Kim	Y.H. Lee	1. CM rated LSZH cable is added. 2. Clause 2.5 Screen is changed. - Percentage of braid coverage is added.
03	2012.05.11	K.H. Ha	T.W. Kim	Y.H. Lee	1. ANSI/TIA-568-C.2 specification is applied.
04	2012.07.06	K.H. Ha	T.W. Kim	Y.H. Lee	1. Product part number is added to Appendix. 2. Performance is changed to IEC 61156-5 standard criteria. (clause 3 & 4) 3. Riser grade is omitted. (clause 1 & 4.4) 4. Changed sheath thickness & deviation range, clause 2.6 5. Rip cord is omitted.
05	2012.07.18	K.H. Ha	T.W. Kim	Y.H. Lee	1. Polyester tape for core wrapping is optional.
06	2015.10.21	K.H. Ha	-	S.J. Kim	1. Clause 4.4 Flame Retardants are changed.