



1U Cat 6 48-port Unshielded Dual IDC Patch Panel



Features

- Dual IDC allows both 110 and Krone tools to be used for termination
- Comes with front labels
- Comes with rear wire manager bar
- Support both T568A and T568B wiring
- Support Gigabit Ethernet application

Electrical Characteristics


IDC	Insulation Resistance	Dielectric Withstand Voltage
22-24 AWG Solid Wire	500 mΩ @ 100 VDC	1000 VAC @ RMS, 60 Hz 1 min

Mechanical and Physical Characteristics

IDC	Housing	RJ45 Jack	RJ45 Jack Insertion Cycle
Phosphor Bronze Alloy with 100u" Sn Alloy	PC UL94V-0	8P8C Phosphor Bronze Alloy plated 50u" gold, plated over 70~100u" Nickel	> 750 cycles (min)

Standards

- ANSI/TIA-568-C.2
- ISO/IEC 11801
- CENELEC EN50173
- UL 1863

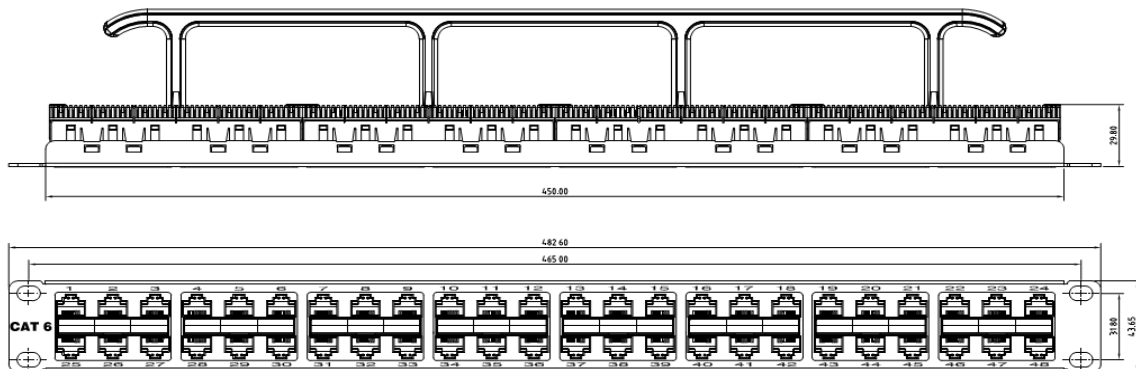

Part Number #	Description
302-201601-48AB	1U Cat 6 48-port Unshielded Dual IDC Patch Panel c/w rear Wire Manager