


UNIPUR® flexible at low temperature, with customer markings, halogen-free, wear resistant, robust, meter marking

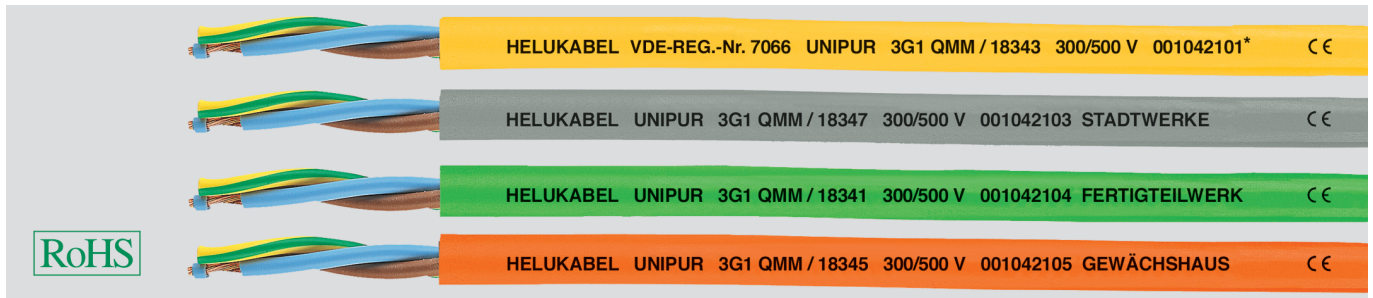

Technical data

- Spezial TPE/PUR connecting cable adapted to DIN VDE 0285-525-2-21 / DIN EN 50525-2-21
- **Temperature range** flexing -40°C to +90°C
- **Nominal voltage** up to 1 mm² U₀/U 300/500 V from 1,5 mm² U₀/U 450/750 V
- **Test voltage** 3000 V
- **Minimum bending radius** flexing 10x cable Ø fixed installation 5x cable Ø
- **Radiation resistance** up to 100x10⁶ cJ/kg (up to 100 Mrad)

Cable structure

- Bare copper-conductor, to DIN VDE 0295 cl.5, fine-wire, BS 6360 cl.5, IEC 60228 cl.5
- Core insulation of thermoplastic elastomere (TPE)
- Core identification to DIN VDE 0293-308 - up to 5 cores coloured - from 6 cores, black with continuous white numbering
- GN-YE conductor, 3 cores and above
- Cores stranded in layers with optimal lay-length
- Outer sheath of PUR compound type TMPU adapted to DIN EN 50363-10-2
- Sheath colour by request
- with meter marking

Properties

- Abrasion resistant, Notch resistant
- Resistant to tearing and cutting
- Good flexibility at low temperatures down to -40°C
- **Resistant to** Oils and fats Water and weathering effects Ozone and oxygen UV-radiation Hydrolysis Microbial attack
- The materials used in manufacture are cadmium-free and contain no silicone and free from substances harmful to the wetting properties of lacquers

Note

- G = with green-yellow conductor x = without green-yellow conductor (OB).
- Please add the individual part no. for order with the identification colour code:
0 = approx.RAL 5015 blue
1 = approx.RAL 6018 green
2 = approx.RAL 8003 brown
3 = approx.RAL 1021 yellow*
4 = approx.RAL 3000 red
5 = approx.RAL 2003 orange
6 = approx.RAL 4005 violet
7 = approx.RAL 7001/7032 grey
Further colours on request.
*with yellow outer sheath as storage types
- VDE-Reg.No. cable with 2-7 cores
- AWG sizes are approximate equivalent values. The actual cross-section is in mm².
- screened analogue type:

UNIPUR®-CP

Application

These robust and flexible cables are used for electrical tools such as drills, hand-held circular saws, and garden equipment as well as for portable motors and machinery in agriculture, at building sites, for hobbies, docks and refrigeration plants.

Extremely good mechanical characteristics e. g. compressive load, good abrasion and near-resistant.

CE= The product is conformed with the EC Low-Voltage Directive 2006/95/EC.

Part no.	No. cores x cross-sec. mm ²	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
1812x	2 x 0,5	5,8	9,6	40,0	20
1813x	3 G 0,5	6,1	14,4	47,0	20
1814x	4 G 0,5	6,7	19,0	57,0	20
1815x	5 G 0,5	7,5	24,0	65,0	20
1816x	7 G 0,5	9,0	33,6	94,0	20
1817x	12 G 0,5	10,7	58,0	150,0	20
1818x	18 G 0,5	13,0	86,0	208,0	20
1819x	25 G 0,5	15,6	120,0	276,0	20
1820x	34 G 0,5	17,9	163,0	393,0	20
1821x	41 G 0,5	19,6	197,0	460,0	20

Part no.	No. cores x cross-sec. mm ²	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
1822x	2 x 0,75	6,3	14,0	52,0	19
1823x	3 G 0,75	6,9	21,6	62,0	19
1824x	4 G 0,75	7,5	28,8	80,0	19
1825x	5 G 0,75	8,3	36,0	94,0	19
1826x	6 G 0,75	9,0	43,0	111,0	19
1827x	7 G 0,75	9,8	50,0	160,0	19
1828x	12 G 0,75	11,6	86,0	191,0	19
1829x	18 G 0,75	14,1	130,0	267,0	19
1830x	25 G 0,75	17,0	180,0	376,0	19
1831x	34 G 0,75	19,5	245,0	506,0	19
1832x	41 G 0,75	21,2	296,0	596,0	19

Continuation ▢

UNIPUR® flexible at low temperature, with customer markings, halogen-free, wear resistant, robust, meter marking



Part no.	No. cores x cross-sec. mm ²	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
1833x	2 x 1	6,8	19,2	59,0	18
1834x	3 G 1	7,2	29,0	70,0	18
1835x	4 G 1	7,8	38,0	87,0	18
1836x	5 G 1	8,8	48,0	100,0	18
1837x	6 G 1	9,7	58,0	131,0	18
1838x	7 G 1	10,6	67,0	182,0	18
1839x	12 G 1	12,6	115,0	230,0	18
1840x	18 G 1	15,3	173,0	325,0	18
1841x	25 G 1	18,3	240,0	476,0	18
1842x	34 G 1	21,0	326,0	616,0	18
1843x	41 G 1	22,9	394,0	724,0	18
1844x	2 x 1,5	8,3	29,0	92,0	16
1845x	3 G 1,5	8,8	43,0	108,0	16
1846x	4 G 1,5	9,7	58,0	144,0	16
1847x	5 G 1,5	10,7	72,0	168,0	16
1848x	6 G 1,5	11,8	86,0	201,0	16
1849x	7 G 1,5	12,9	101,0	230,0	16
1850x	12 G 1,5	15,5	173,0	306,0	16
1851x	18 G 1,5	18,7	259,0	464,0	16
1852x	25 G 1,5	22,9	360,0	641,0	16
1853x	34 G 1,5	25,9	490,0	857,0	16
1854x	41 G 1,5	28,3	590,0	1010,0	16

Part no.	No. cores x cross-sec. mm ²	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
1855x	2 x 2,5	9,9	48,0	120,0	14
1856x	3 G 2,5	10,5	72,0	148,0	14
1857x	4 G 2,5	11,6	96,0	184,0	14
1858x	5 G 2,5	13,0	120,0	224,0	14
1859x	7 G 2,5	15,5	168,0	301,0	14
1860x	12 G 2,5	19,2	288,0	489,0	14
1861x	2 x 4	11,5	77,0	149,0	12
1862x	3 G 4	12,2	115,0	240,0	12
1863x	4 G 4	13,5	154,0	297,0	12
1864x	5 G 4	15,0	192,0	360,0	12
1865x	7 G 4	18,3	268,0	540,0	12
1866x	2 x 6	13,1	115,0	240,0	10
1867x	3 G 6	14,1	173,0	370,0	10
1868x	4 G 6	15,6	230,0	472,0	10
1869x	5 G 6	17,3	288,0	581,0	10
1870x	7 G 6	21,0	403,0	698,0	10
1871x	3 G 10	18,0	288,0	560,0	8
1872x	4 G 10	20,1	384,0	718,0	8
1873x	5 G 10	22,2	480,0	896,0	8
1874x	3 G 16	23,4	461,0	940,0	6
1875x	4 G 16	25,5	614,0	1068,0	6
1876x	5 G 16	28,3	768,0	1810,0	6

Dimensions and specifications may be changed without prior notice. (RA02)