




New

UNITRONIC® LAN 1000 S/FTP Cat.7

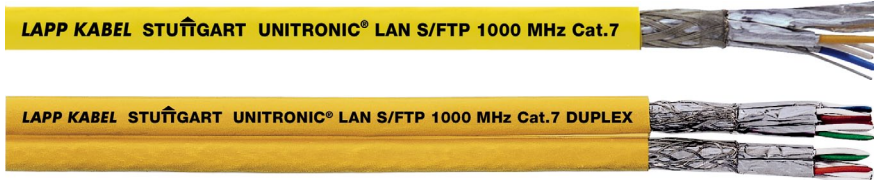

Benefits

- LAN cables for structured building cabling according to EN 50173 and ISO/IEC 11801

Application range

- Mainly used where the terminal density is very high, e.g. for wiring office, administration and development buildings in the tertiary area (floor wiring).
- Cable length in tertiary area (horizontal area, floor) should not exceed a length of 100 m in accordance with the ISO/IEC 11801 and EN 50173 standards (90 m in cable duct + 10 m in working area)

Product features

- Transfer of digital and analogue data signals
- IEEE 802.3: 10/100/1000Base-T, 10GBase-T
- IEEE 802.5: ISDN; FDDI; ATM; cable sharing
- IEEE 802.3at: suitable for PoE

Norm references / Approvals

- Class F in the ISO/IEC 11801 standard corresponds to CAT.7

Product make-up

- S/FTP: copper braid as overall screening and pair screening with aluminium compound foil
- Solid conductor
- Outer sheath: halogen-free, flame-retardant compound
- Colour: yellow (RAL 7032)

Technical data

Minimum bending radius
during installation: 8 x outer diameter
Fixed installation: 4 x outer diameter

Temperature range
Operating temperature: -20°C to +60°C
During installation: 0 °C to +50 °C

Characteristic impedance
100 Ohm +/- 15%

Article number	Article designation	Number of pairs and AWG per conductor	Outer diameter (mm)	Copper index (kg/km)	Weight (kg/km)
Halogen-free versions					
2170614	1000 S/FTP Cat.7 LSZH	4 x 2 x AWG23/1	7.7	27.0	60
2170634	1000 S/FTP Cat.7 duplex	2 x (4 x 2 x AWG23/1)	7.7 x 15.4	54.0	120

Unless specified otherwise, the shown product values are nominal values. Detailed values (e.g. tolerances) are available upon request.
Copper price basis: EUR 150/100kg. Refer to catalogue appendix T17 for the definition and calculation of copper-related surcharges.
Please find our standard lengths at: www.lappkabel.de/en/cable-standardlengths
Packaging size: Coil 100 m; Drum (500; 1000) m
Detailed data sheets are available upon request. Please specify the type/dimensions of the required cable.
Photographs are not to scale and do not represent detailed images of the respective products.