


# CABLE SPECIFICATION

Sectional view:

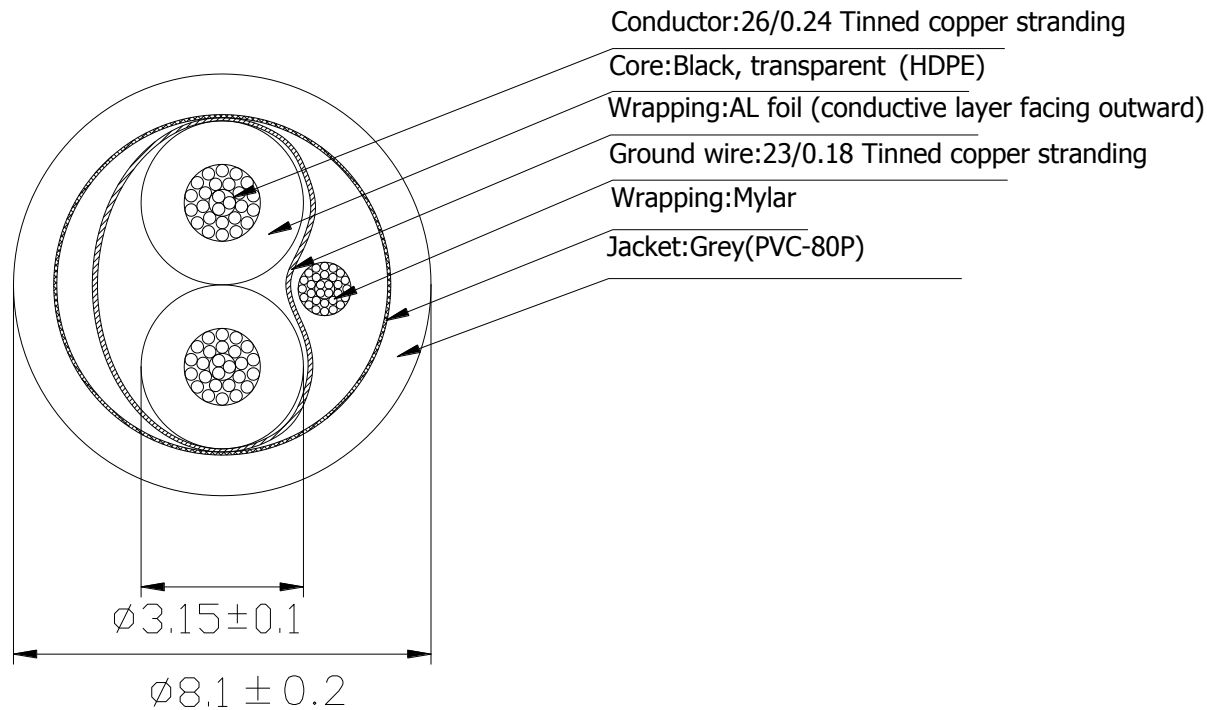

Coding content:

 ALTEK KABEL 1PR 16AWG TWISTED SCREENED AUDIO & INSTRUMENTATION CABLE + Meter

<b>Model</b>	8760 1P×16AWG	
<b>Conductor</b>	26/0.24 Tinned copper stranding	
<b>Maximum conductor resistance <math>\Omega</math> / KM (20 °C)</b>	14.9	
<b>ID</b>	3.15±0.1mm	
<b>Core color</b>	Black, transparent	
<b>Insulation Materials</b>	HDPE	
<b>Synchronization completed</b>	<b>Stranding</b>	Two-core stranding
	<b>Wrapping</b>	Aluminum foil (conductive layer facing outward)
	<b>Ground wire</b>	23/0.18 Tinned copper stranding
<b>Wrapping</b>	Mylar	
<b>Jacket</b>	Grey (PVC-80P)	
<b>OD</b>	8.1±0.2mm	
<b>Sheath thickness</b>	0.7mm	
<b>Rated voltage</b>	300/300V	
<b>Processing methods and scope</b>	Cabling project, without processing	
<b>Draw</b>	<b>Audit</b>	<b>Approved</b>
<b>Customer Confirm:</b>		
<b>SHENZHEN HAILUTONG WIRE&amp;CABLE CO.,LTD</b>		