


CABLE SPECIFICATION

Sectional view:

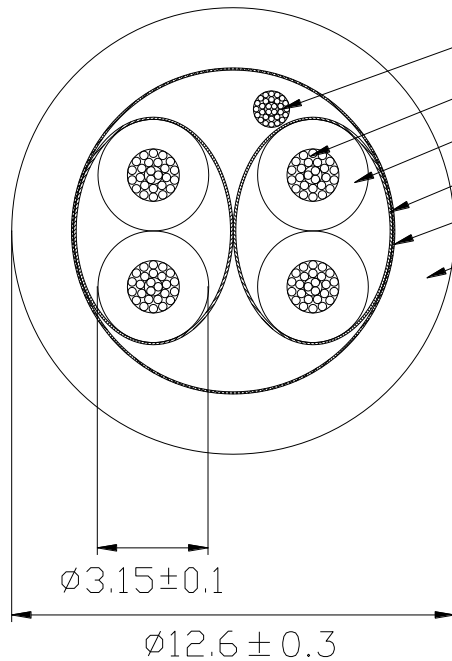

Ground wire: 23/0.18 Tinned copper stranding

Conductor: 26/0.24 Tinned copper stranding

Core: Black, transparent; Black, red (HDPE)

Wrapping: AL foil (conductive layer facing outward)

Wrapping: Mylar

Jacket: Grey (PVC-80P)

Coding content:



ALTEK KABEL 2PR 16AWG TWISTED SCREENED AUDIO & INSTRUMENTATION CABLE + Meter

| | | |
|--|---|---------------------------------|
| Model | 8760 2P×16AWG | |
| Conductor | 26/0.24 Tinned copper stranding | |
| Maximum conductor resistance Ω / KM (20 °C) | 14.9 | |
| ID | 3.15±0.1mm | |
| Core color | Black, transparent; Black, red | |
| Insulation Materials | HDPE | |
| Twisted pair | Black, transparent; Black, red | |
| Each pair wrapping | Aluminum foil (conductive layer facing outward) | |
| Synchronization completed | Stranding | Two pairs of twisted |
| | Ground wire | 23/0.18 Tinned copper stranding |
| Wrapping | Mylar | |
| Jacket | Grey (PVC-80P) | |
| OD | 12.6±0.3mm | |
| Sheath thickness | 1.2mm | |
| Rated voltage | 300/300V | |
| Processing methods and scope | Cabling project, without processing | |
| SHENZHEN HAILUTONG WIRE&CABLE CO.,LTD | | |

Customer Confirm:

Draw

Audit

Approved

SHENZHEN HAILUTONG WIRE&CABLE CO.,LTD