


# CABLE SPECIFICATION

Sectional view:

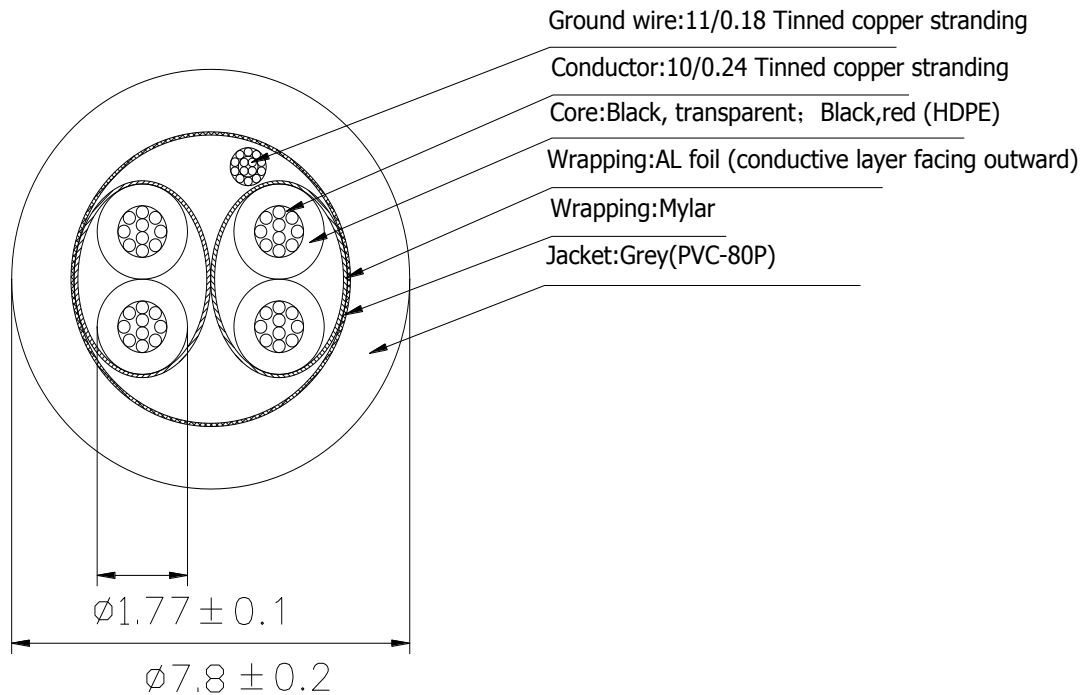

Coding content:

 ALTEK KABEL 2PR 20AWG TWISTED SCREENED AUDIO & INSTRUMENTATION CABLE + Meter

<b>Model</b>	8760 2P×20AWG	
<b>Conductor</b>	10/0.24 Tinned copper stranding	
<b>Maximum conductor resistance <math>\Omega</math> / KM (20 °C)</b>	38.1	
<b>ID</b>	1.77±0.1mm	
<b>Core color</b>	Black, transparent; Black, red	
<b>Insulation Materials</b>	HDPE	
<b>Twisted pair</b>	Black, transparent; Black, red	
<b>Each pair wrapping</b>	Aluminum foil (conductive layer facing outward)	
<b>Synchronization completed</b>	<b>Stranding</b>	Two pairs of twisted
	<b>Ground wire</b>	11/0.18 Tinned copper stranding
<b>Wrapping</b>	Mylar	
<b>Jacket</b>	Grey (PVC-80P)	
<b>OD</b>	7.8±0.2mm	
<b>Sheath thickness</b>	0.9mm	
<b>Rated voltage</b>	300/300V	

<b>Draw</b>	<b>Audit</b>	<b>Approved</b>	<b>Processing methods and scope</b>	Cabling project, without processing
			<b>SHENZHEN HAILUTONG WIRE&amp;CABLE CO.,LTD</b>	

**Customer Confirm:**