



CABLE SPECIFICATION

Sectional view:

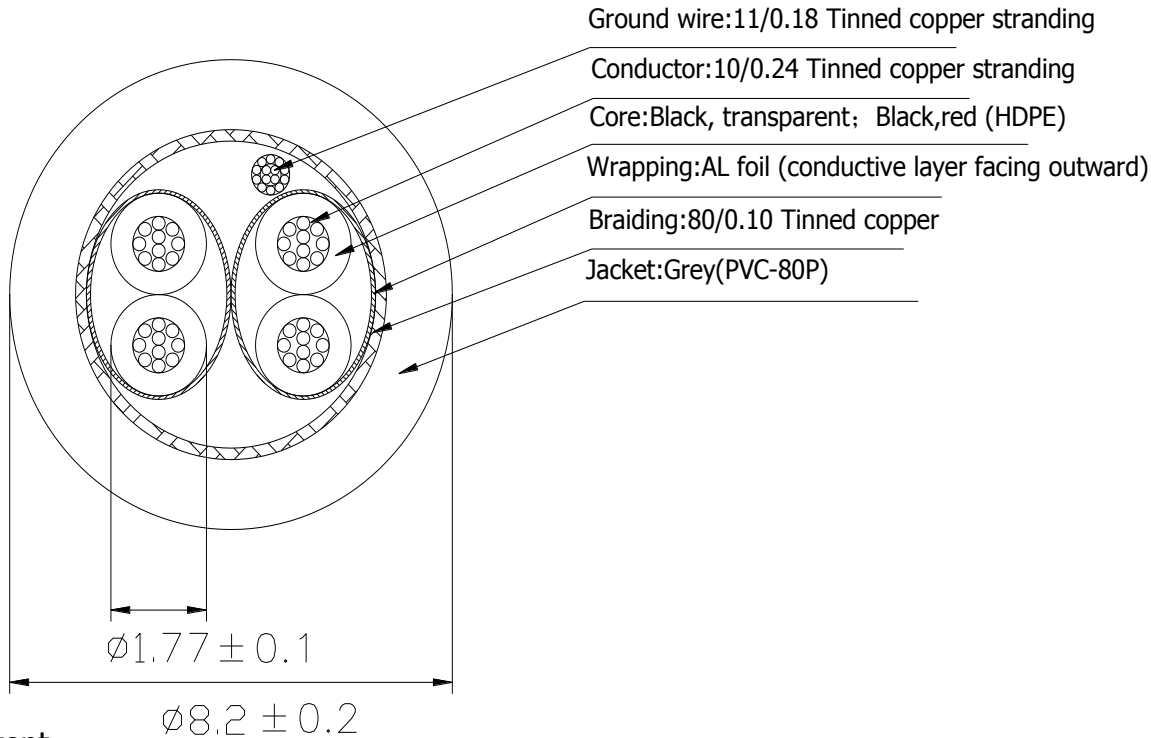

Coding content:

 ALTEK KABEL 2PR 20AWG TWISTED SCREENED BRAIDED SHIELDED AUDIO & INSTRUMENTATION CABLE + Meter

| | | | | |
|--|---|--------------------------------|-----------------|--|
| Model | 8760 1P×20AWG+B | | | |
| Conductor | 10/0.24Tinned copper stranding | | | |
| Maximum conductor resistance Ω / KM (20 °C) | 38.1 | | | |
| ID | 1.77±0.1mm | | | |
| Core color | Black, transparent; Black,red | | | |
| Insulation Materials | HDPE | | | |
| Twisted pair | Black, transparent; Black,red | | | |
| Each pair wrapping | Aluminum foil (conductive layer facing outward) | | | |
| Synchronization completed | Stranding | Two pairs of twisted | | |
| | Ground wire | 11/0.18Tinned copper stranding | | |
| braiding | 80/0.10Tinned copper | | | |
| Jacket | Grey(PVC-80P) | | | |
| OD | 8.2±0.2mm | | | |
| Sheath thickness | 0.9mm | | | |
| Rated voltage | 300/300V | | | |
| Processing methods and scope | Cabling project, without processing | | | |
| Customer Confirm: | Draw | Audit | Approved | SHENZHEN HAILUTONG WIRE&CABLE CO.,LTD |