


CABLE SPECIFICATION

Sectional view:

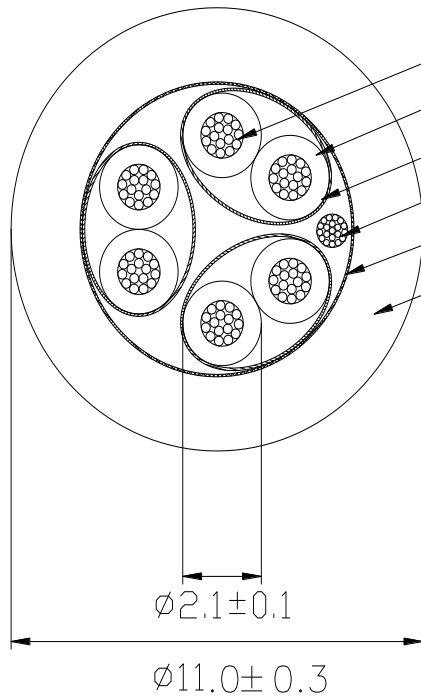

- Conductor: 16/0.24 Tinned copper stranding
- Core: Black, transparent; Black, red; Black, white (HDPE)
- Wrapping: AL foil (conductive layer facing outward)
- Ground wire: 15/0.18 Tinned copper stranding
- Wrapping: Mylar
- Jacket: Grey (PVC-80P)

Coding content:



ALTEK KABEL 3PR 18AWG TWISTED SCREENED AUDIO & INSTRUMENTATION CABLE + Meter

Model		8760 3P×18AWG
Conductor		16/0.24 Tinned copper stranding
Maximum conductor resistance Ω / KM (20 °C)		23.9
ID		2.1±0.1mm
Core color		Black, transparent; Black, red; Black, white
Insulation Materials		HDPE
Twisted pair		Black, transparent; Black, red; Black, white
Each pair wrapping		Aluminum foil (conductive layer facing outward)
Synchronization completed	Stranding	Three pairs of twisted
	Ground wire	15/0.18 Tinned copper stranding
Wrapping		Mylar
Jacket		Grey (PVC-80P)
OD		11.0±0.3mm
Sheath thickness		1.4mm
Rated voltage		300/300V
Processing methods and scope		Cabling project, without processing

Draw	Audit	Approved

Customer Confirm:

SHENZHEN HAILUTONG WIRE&CABLE CO.,LTD