


CABLE SPECIFICATION

Sectional view:

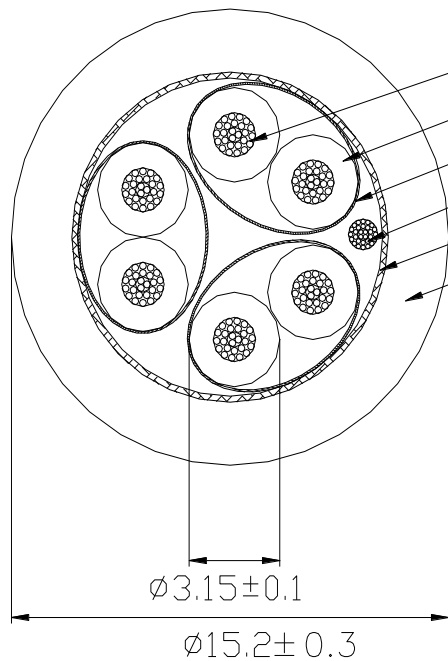

- Conductor: 26/0.24 Tinned copper stranding
- Core: Black, transparent; Black, red; Black, white (HDPE)
- Wrapping: AL foil (conductive layer facing outward)
- Ground wire: 23/0.18 Tinned copper stranding
- Braiding: 96/0.10 Tinned copper
- Jacket: Grey (PVC-80P)

Coding content:

 ALTEK KABEL 3PR 16AWG TWISTED SCREENED BRAIDED SHIELDED AUDIO & INSTRUMENTATION CABLE + Meter

Model	8760 3P×16AWG+B	
Conductor	26/0.24 Tinned copper stranding	
Maximum conductor resistance Ω / KM (20 °C)	14.9	
ID	3.15±0.1mm	
Core color	Black, transparent; Black, red; Black, white	
Insulation Materials	HDPE	
Twisted pair	Black, transparent; Black, red; Black, white	
Each pair wrapping	Aluminum foil (conductive layer facing outward)	
Synchronization completed	Stranding	Three pairs of twisted
	Ground wire	23/0.18 Tinned copper stranding
braiding	96/0.10 Tinned copper	
Jacket	Grey (PVC-80P)	
OD	15.2±0.3mm	
Sheath thickness	1.4mm	
Rated voltage	300/300V	

Draw	Audit	Approved

Customer Confirm:

Processing methods and scope	Cabling project, without processing
SHENZHEN HAILUTONG WIRE&CABLE CO.,LTD	