


CABLE SPECIFICATION

Sectional view:

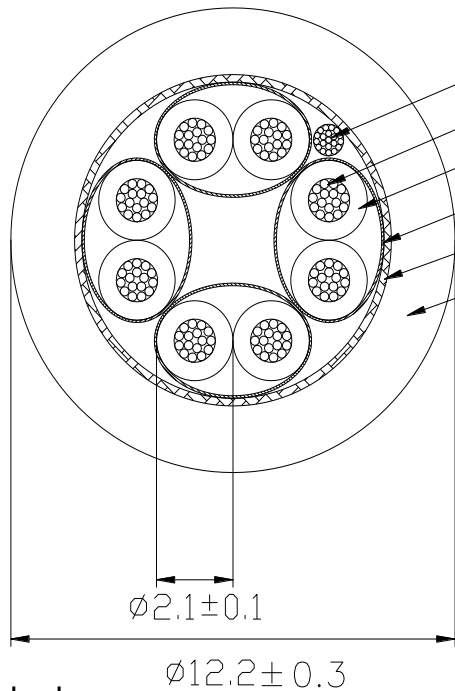

- Ground wire: 15/0.18 Tinned copper stranding
- Conductor: 16/0.24 Tinned copper stranding
- Core: Black, transparent; Black, red; Black, white; Black, blue (HDPE)
- Wrapping: AL foil (conductive layer facing outward)
- Braiding: 96/0.10 Tinned copper
- Jacket: Grey (PVC-80P)

Coding content:

 ALTEK KABEL 4PR 18AWG TWISTED SCREENED BRAIDED SHIELDED AUDIO & INSTRUMENTATION CABLE + Meter

Model	8760 4P×18AWG+B	
Conductor	16/0.24 Tinned copper stranding	
Maximum conductor resistance Ω / KM (20 °C)	23.9	
ID	2.1±0.1mm	
Core color	Black, transparent; Black, red; Black, white; Black, blue	
Insulation Materials	HDPE	
Twisted pair	Black, transparent; Black, red; Black, white; Black, blue	
Each pair wrapping	Aluminum foil (conductive layer facing outward)	
Synchronization completed	Stranding	Four pairs of twisted
	Ground wire	15/0.18 Tinned copper stranding
braiding	96/0.10 Tinned copper	
Jacket	Grey (PVC-80P)	
OD	12.2±0.3mm	
Sheath thickness	1.4mm	
Rated voltage	300/300V	
Processing methods and scope	Cabling project, without processing	

Customer Confirm:

Draw	Audit	Approved

SHENZHEN HAILUTONG WIRE&CABLE CO.,LTD