



Line Interactive UPS

PRO2000SFC/SFCU



Super Fast Charging



True AVR



Wide Input Voltage



Overload Protection



Over Temperature Protection




Surge Protection



Early Shutdown Warning System



Universal Socket

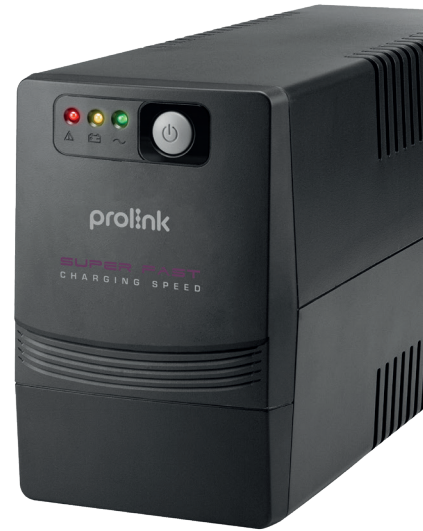

Prolink PRO2000SFC/SFCU single-phase input/ single-phase output Line-Interactive 2000VA UPS is a single-phase input/ single-phase output Line-Interactive UPS system with PROLiNK's latest Super-Fast Charging technology. This cutting-edge technology is able to recharge the battery back to 90% of its capacity within 2-4 hours, perfect for areas with intermittent power.

Advance Early Warning system immediately alerts you to an output overload, high temperature or low battery condition, giving you ample time to either correct the condition or shut down your system before battery time runs out.


Intelligent Battery Management system provides additional protection for battery overcharging or deep discharging, while maximizing battery performance, life and reliability through intelligent precision charging. In the event of over temperature and overload, the device will automatically shutdown to prevent any damage from occurring.

Lastly, this device is supported with a wide input voltage range. The unit also comes with universal sockets to provide better compatibility with a wider range of connected devices.

PRO2000SFC/SFCU is an ideal solution for safe and stable backup power to home/ small office applications.

Key Features

- **Built-in super fast charger, battery can be recharged to 90% of its capacity within 2-4 hours**
- **Excellent microprocessor control guarantees high reliability**
- **Boost and buck AVR for voltage stabilization**
- **Auto restart while AC is recovering**
- **Simulated sine wave**
- **Off-mode charging**
- **Cold start function**
- **RJ45 ports (Fax/Modem Protection)**
- **Optional USB communication port**
- **Optional HID Compliant USB (for PRO2000SFCU)**

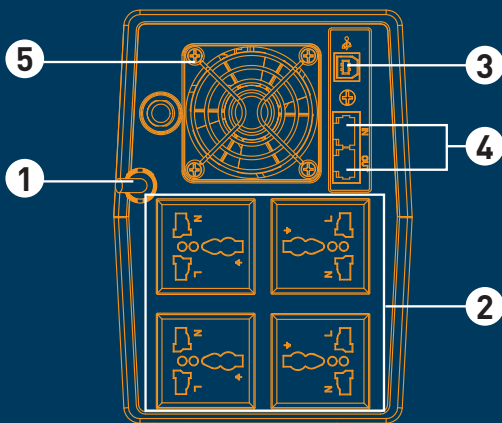

Legend:

1. Power AC Input
2. Backup Outlets
3. USB Port (Only for PRO2000SFCU)
4. RJ45 Ports
5. Cooling Fan

Specifications

Capacity		2000VA
Input	Voltage Range Frequency Phase	140~300VAC $\pm 5\%$ 50Hz/60Hz (Auto-sensing) Single + GND
Output	Voltage Range Battery Mode Frequency Waveform Transfer Time	230VAC +12% -14% 230VAC +10% -10% 50Hz/60Hz $\pm 1\%$ (Battery mode) Simulated sine wave (Battery mode) Sine wave (AC mode) 2ms typical
Battery	Type Backup Time Recharge Time	12V/10AH - 2pc Up to 40 mins depending on load 2-4 hours recover to 90% capacity
Protection/ Monitoring	Short Circuit Protection Surge Protection Alarm UPS Protection Overload Protection Intelligent Battery Management	Yes (Line mode & battery mode) Yes Audible & visual Load Auto Sensing and Abnormal Protection Line mode : 110 - 120% 5 mins & shutdown >120% shutdown immediately Battery mode : 100 - 110% alarm & shutdown in 10 secs >120% shutdown immediately Prevent overcharging of battery Protect battery and prolong battery life
Interface	RJ45 Ports USB Connector*	Modem/Fax Protection AC fault, battery low, shutdown UPS
General	Software Noise Level Temperature Humidity Power Factor Built-in AVR	Support Windows® 2000/ 2003/ XP/ Vista/ 2007/ 8/ 10, Linux, and Mac <40dB 0°C - 40°C 0 - 90% Up to 0.7 TRUE Full AVR (3 Steps)
Physical	Dimension (D x W x H) Weight	320 x 130 x 182mm 10.6kg

*Only applicable for model PRO2000SFCU.

Authorised Distributor/ Reseller:

Compatible with:



System Requirements:
Windows XP/Vista/7/8/10, Mac, Linux