

AWM 2464 STYLE

Multiple-conductor cable using non-integral jacket

CE   Standard UL Subject 758 / UL Standard 1581




제품용도(Applications)

전기 전자 기기의 내부 또는 외부 연결용.(계산기, 탐지기, X-RAY 장비 등)
Internal wiring or external interconnection of electronic equipment(such as desk-type calculators, dictating machines, or x-ray equipment).

제품특성(Characteristic)

- 정격(Rating Temp.& Volt) : UL 80°C 300V
- 난연성(Flammability) : VW-1, FT1 Pass
- 생산범위(Product Range) : 32AWG~4/0AWG

제품 구조(Construction)

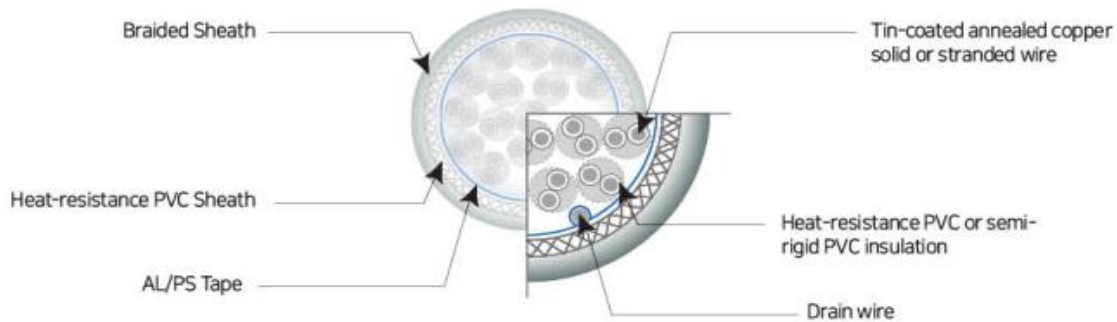

도체 Conductors			절연체 Insulation		실드 Shield			재킷 Jacket	
사이즈 AWG Size	코어 수 Number of Core pcs	구성 Number&dia of conductors pcs/㎜	재질 Material	평균두께 Nominal Thickness ㎜	금속 유형 Metal of TYPE	랩 Wrap shield	편조 Braided shield	재질 Material	평균두께 Nominal Thickness ㎜
30	2~50	7/0.10	Heat-resistance PVC or Appliance material	0.25	Optional	Optional	Optional	Extruded PVC	0.80
28	2~50	7/0.127		0.25					
26	2~50	7/0.16		0.25					
24	2~50	11/0.16		0.25					
22	2~50	17/0.16		0.25					
20	2~50	21/0.18		0.25					
18	2~50	34/0.18		0.25					
16	2~50	26/0.254		0.25					