

LIEBERT® itON-SOHO

Compact, Highly Efficient Power Protection for Small and Home Offices
• 600VA



FEATURES

Key Features:

- Universal Sockets
- USB Port Mobile Charger
- Built-in Boost and Buck AVR
- Space for large power plugs
- Fuse Protection

Other Features:

- Microprocessor control guarantees high system reliability
- Provides AC overload protection
- Auto restart when AC source recovers
- Compact size, lightweight
- Fast charging
- OFF mode charging
- Cold start function
- Overload protection and alarm
- Surge protector against transient voltages

Key Advantages

- AVR features gives higher protection level by correcting high and low voltage without using valuable battery power
- Universal sockets ensures hassle-free connection of virtually any equipment input plug types.
- Standard USB mobile charger allows for fast and safe charging or powering any electronic peripherals like routers, modems, wireless storage devices and etc.


From small to medium-sized businesses, availability of critical IT infrastructure is important. Without reliable power protection, you run the risk of equipment breakdowns, interruptions and lost revenue.



Introducing the Liebert® itON-SOHO. Vertiv's high efficiency uninterruptible power supply (UPS) solution specifically designed for small office and home office (SOHO) With its universal sockets, mobile charger and compact design, the Liebert® itON-SOHO line-interactive UPS protects vital equipments in this ever growing application.

Ideally Suited for

- Desktop PCs
- Professional workstations
- Small routers, bridges, and hubs
- Point-of-sale terminals
- Small office applications

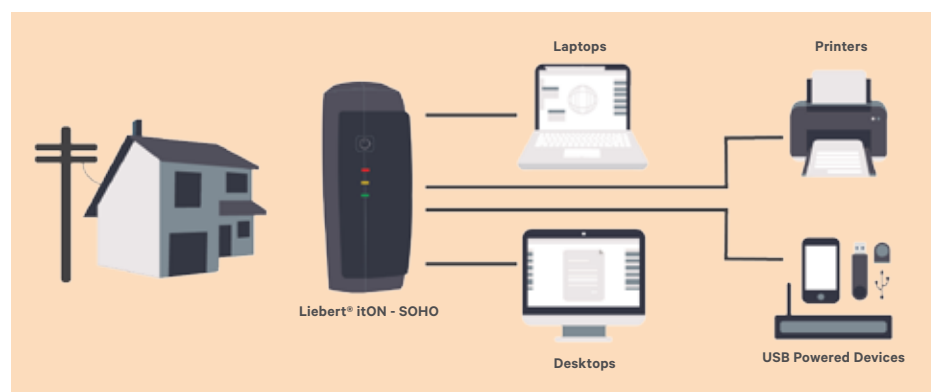

The Liebert® itON-SOHO is a feature-rich reliable line-interactive UPS. It has an automatic voltage regulator (AVR) that allows flexibility and reliability for PCs and other sensitive electronic equipment. Designed with simple controls for easy operation, the Liebert® itON-SOHO provides more than enough backup time to save work in process. It is ideal for both small and home office, and its compact design and user-friendly interface makes it ideal in providing maximum protection of IT equipment.

Technical Specifications

MODEL NUMBER	PSA600-SOHO
Capacity (VA/W)	600/360
Unit Net Weight, lb. (kg)	9.7(4.4)
Unit Dimensions – W x D x H, in. (mm)	3.3 x 10.7 x 7.9 (121 x 310 x 268)
Shipping weight, lb. (kg)	11(5)
Shipping Dimensions- WxDxH, in. (mm)	4.7 x 12.2 x 10.5 (121 x 310 x 268)
On-Line Input Voltage Range	162-290VAC, single phase
On-Line Frequency	50hz/60Hz (auto sensing)
Online Frequency Range (50Hz/60Hz)	45 - 55Hz ± 1Hz / 55 - 65Hz ± 1 HZ
Output Voltage (Utility Power Normal)	220VAC/230VAC/240VAC, single phase
Output Voltage (Battery Operation)	230V+10%,-20%
On-Battery Wave Form	Stepped sinewave
Output Frequency Battery Mode	50Hz(60Hz) ±1Hz
Battery Type - VDC x Ah X Quantity	12V X 7 Ah x 1
Typical Recharge Time	4 hours to 90%
USB Charger	5.0V / 1.0A
Switch	USB Charge ON.OFF control
Battery Runtime* - 120WLoad	10 minutes
Operating Temperature, °F (°C)	32 to 104 (0 to 40)
Storage Temperature, °F (°C)	-4 to 122 (-20 to 50)
Operating /Storage Relative Humidity	0 -90%, non-condensing

*Battery runtime may vary depending on load