


# CABLE SPECIFICATION

Sectional view:

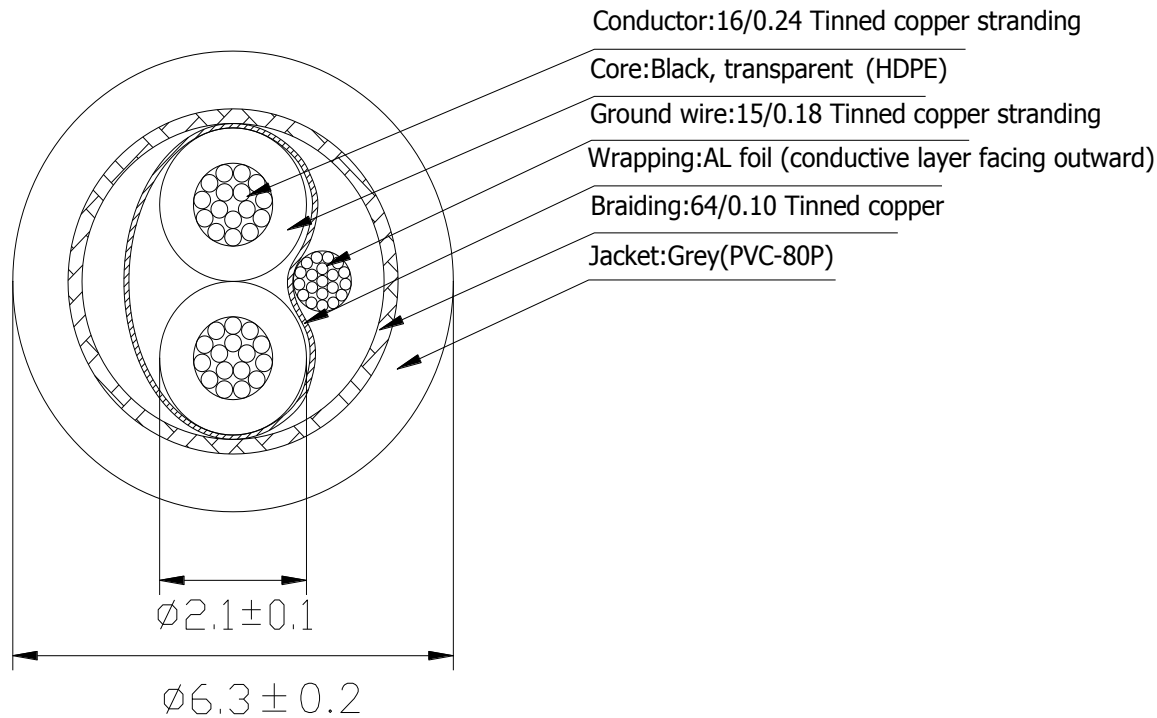

Coding content:

 ALTEK KABEL 1PR 18AWG TWISTED SCREENED BRAIDED SHIELDED AUDIO & INSTRUMENTATION CABLE + Meter

<b>Model</b>	8760 1P×18AWG+B	
<b>Conductor</b>	16/0.24Tinned copper stranding	
<b>Maximum conductor resistance <math>\Omega</math> / KM (20 °C)</b>	23.9	
<b>ID</b>	2.1±0.1mm	
<b>Core color</b>	Black, transparent	
<b>Insulation Materials</b>	HDPE	
<b>Synchronization completed</b>	<b>Stranding</b>	Two-core stranding
	<b>Wrapping</b>	Aluminum foil (conductive layer facing outward)
	<b>Ground wire</b>	15/0.18Tinned copper stranding
<b>braiding</b>	64/0.10Tinned copper	
<b>Jacket</b>	Grey(PVC-80P)	
<b>OD</b>	6.3±0.2mm	
<b>Sheath thickness</b>	0.6mm	
<b>Rated voltage</b>	300/300V	
<b>Processing methods and scope</b>	Cabling project, without processing	

Customer Confirm:

Draw

Audit

Approved

Processing methods and scope

SHENZHEN HAILUTONG WIRE&CABLE CO.,LTD